




Technical information

For Liniar EnergyPlus90 windows




EnergyPlus 90 Casement Window


Vertical Cross Section - Outward opening, internally beaded

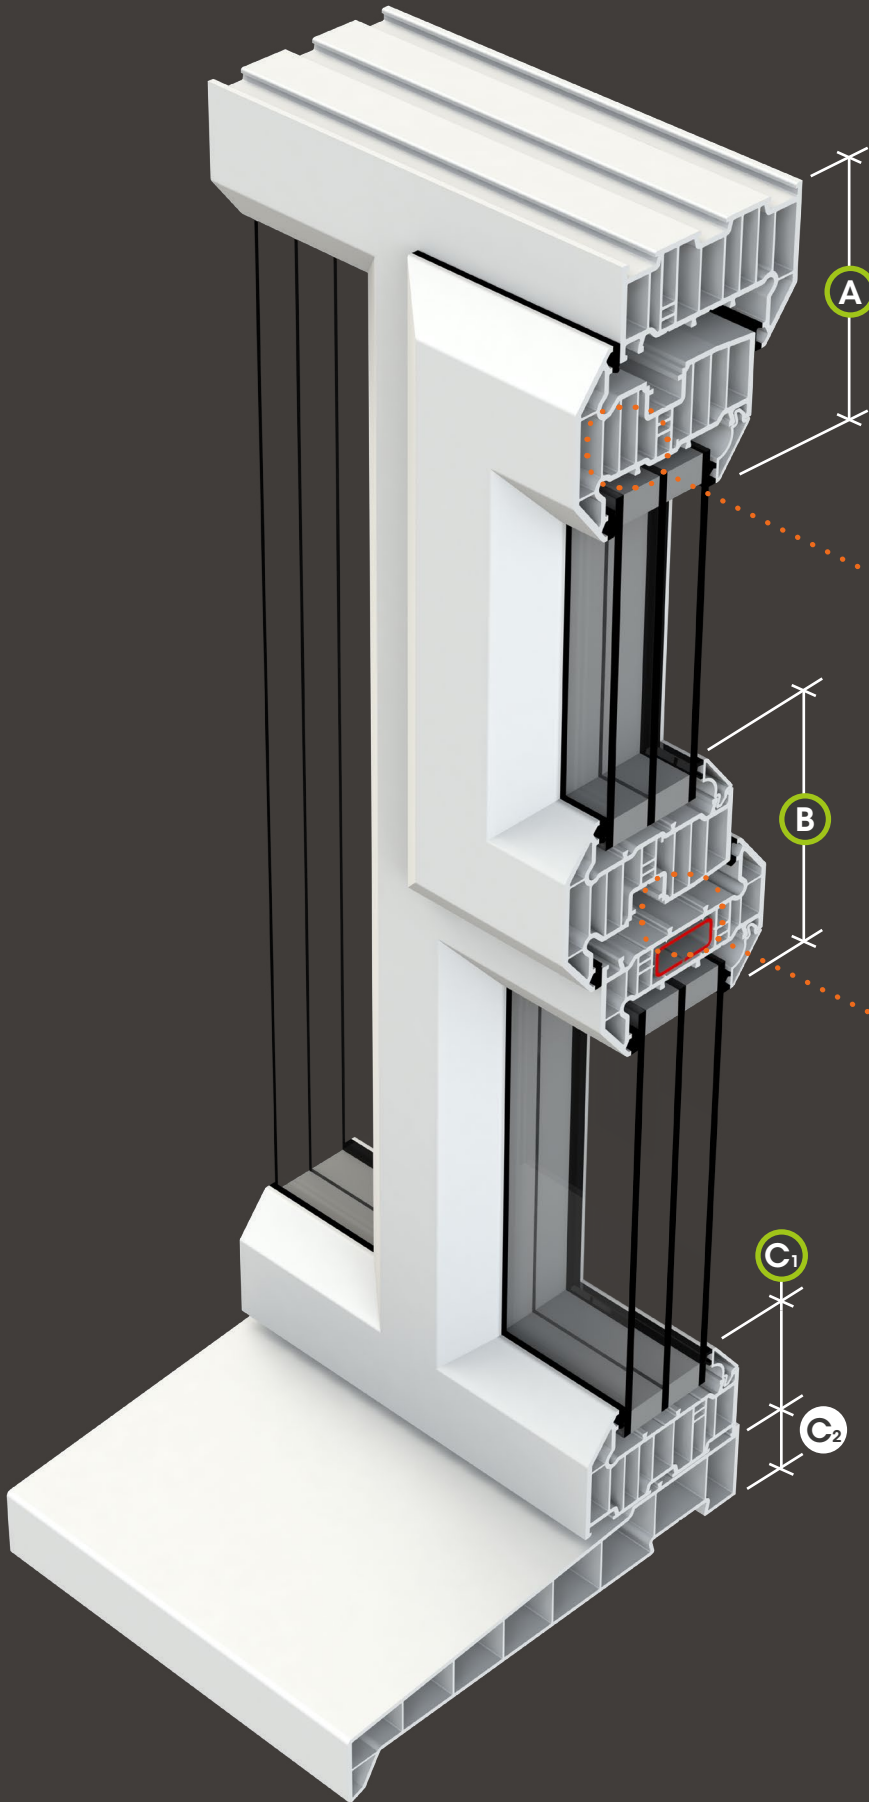

Optional glazing flipper

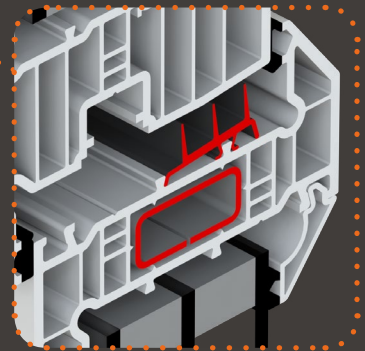

Optional passive flipper

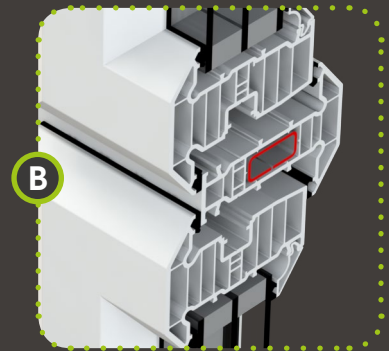

Sash next to Sash

EnergyPlus 90 Casement Window

- WER as high as A++40
- 48mm and 56mm triple glazing options
- Passive House compliant with laminate glazing
- U-values as low as 0.5w/m²K (QGU)
- Acoustic values as high as Rw (C;Ctr) = 42 (-2;-6)

Accreditations



PAS24



BS EN 12608



ISO 9001



BS EN 6375

Colour Options



White




Cream or Cream Foil



7016 Grey




7038 Grey



7155 Grey



7012 Grey



Black

Additional colours are available to order as specials.
The colours shown in this brochure give an indication only.

Product	Dim. A
Small frame & sash LCW9012 & LCW9033	103mm

Product	Dim. B
Transom & sash LCW9022 & LCW9033	116mm
Transom & 2 x sash LCW9022 & 2 x LCW9033	161mm

Product	Dim. C₁
Small frame LCW9012	58mm

Product	Dim. C₂
150, 165, 180 cills LSL150, LCL165, LSL180	30mm



Liniar specification guide

The Liniar Specification Guide is an A4-size, 234-page, full colour guide to specifying energy efficient PVCu windows and doors.

Covering the full range of lead-free Liniar products including EnergyPlus90 casement windows, the Specification Guide includes full product charts, U-values, dimensions, accreditations, safety information and a variety of case studies.

To view an online copy of the Liniar Specification Guide and to order your free copy visit :

www.liniar.co.uk/specification-guide

Liniar
Flamstead House
Denby Hall Business Park
Denby
Derbyshire DE5 8JX

Tel: +44 (0)1332 883900
Fax: +44 (0)1332 883901
Email: sales@liniar.co.uk

www.liniar.co.uk

