Elevate Survey Sheet v1.2

Liniar — A SUBSIDIARY OF Quanex

Please complete and return sheet to roofs@liniar.co.uk or send by fax on 01332 883 884

Note : Verbal confirmations or instructions will not be taken

Company Name :

Contact Name : Contact Telephone :

Email :

Date :

Job Reference :

Installation Postcode : Preferred Delivery Date :

Instructions :

W : (mm)

L : (mm)

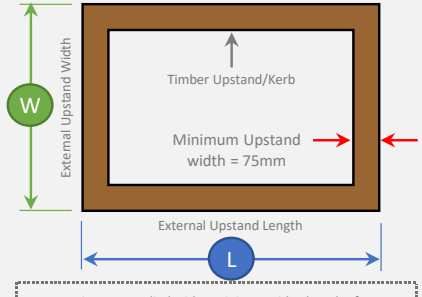

Elevate Min & Max Sizes	Min	Max
External Upstand Length (mm) :	1050	5400
External Upstand Width (mm) :	750	2400

Elevate² Min & Max Sizes	Min	Max
External Upstand Length & Width (mm) :	600	2100

Kits are supplied with a minimum ridge length of 300mm, with the exception of square roofs.

Tick Box of Required Roof Colour All Colours Foiled Finish UOS	External Colour								
	White (substrate) :	Golden Oak :	Rosewood :	Chartwell Green :	Black :	7016 Grey :	Irish Oak :	White :	Cream :
Internal Colour: White (substrate) :									
Internal Colour: Golden Oak :									
Internal Colour: Rosewood :									
Internal Colour: 7016 Grey :									

Reference Information Only.

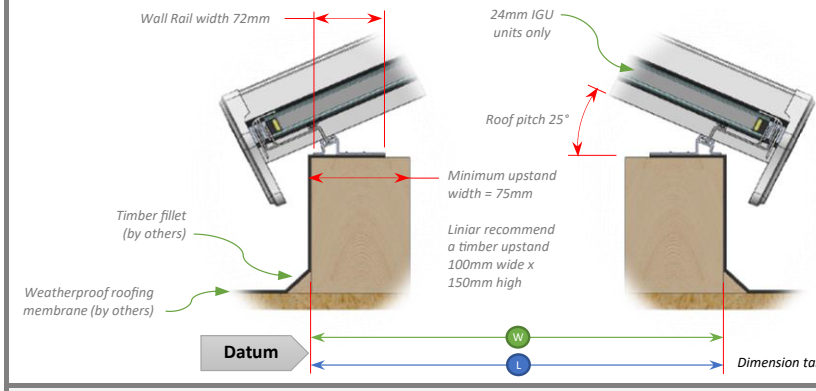

Dimension taken from **external** face of upstand

All Elevate roof kits are supplied with fixed 25° equal roof pitches



Roof kit designs will be supplied on the design configurations below. All roofs will feature no vents UOS. *This section is not relevant for Elevate² square lantern roof kits*

Key :

- Blue shaded colour = **4-16-4**mm glass (20kg/m²)
- Green shaded colour = **6-14-4**mm glass (25kg/m²)
- 0 — Value = Number of Transoms (0-3)

Roof vent feasibility is subject to the proposed roof width and transom centres.

Foiled vent options are no longer available
Coloured vents are supplied in a sprayed finish

External Upstand **Width** (mm) / External Upstand **Length** (mm)

L \ W	up to 600	up to 900	up to 1200	up to 1500	up to 1800	up to 2100	up to 2400
up to 900	0	n/a	n/a	n/a	n/a	n/a	n/a
up to 1200	0	0	n/a	n/a	n/a	n/a	n/a
up to 1500	0	0	0	n/a	n/a	n/a	n/a
up to 1800	0	0	0	0	n/a	n/a	n/a
up to 2100	0	0	0	0	1	n/a	n/a
up to 2400	0	0	0	0	1	1	n/a
up to 2700	1	1	1	1	1	1	1
up to 3000	1	1	1	1	1	1	1
up to 3300	1	1	1	1	2	2	2
up to 3600	1	1	1	1	2	2	2
up to 3900	1	1	1	1	2	2	2
up to 4200	1	1	1	1	2	2	2
up to 4500	1	1	1	2	2	3	3
up to 4800	1	1	1	2	2	3	3
up to 5100	2	2	2	2	3	3	3
up to 5400	2	2	2	3	3	3	3

0 Transoms — No Roof Vent Options Available

1 Transom — No Roof Vent Options Available

2 Transoms — V2 V1 — Include **1** Roof Vent: ☐ Include **2** Roof Vents: ☐

3 Transoms — V4 V2 V1 V3 — Include **2** Roof Vents: ☐ Include **4** Roof Vents: ☐

Roof Glazing

Is Glazing Required ?

Yes : ☐ **No** : ☐

All Elevate glazed roof kit widths up to 2100mm will be supplied in 4-16-4mm glazing (@ 20kg/m²), further kit widths up to 2400mm will be supplied in 6-14-4mm (@ 25kg/m²,* also add 0.1 to the U-value). Any Elevate unglazed kit roofs must adhere to these glazing rules.

Tick glazing colour if required	Blue	Clear	Neutral	Bronze	Aqua	Sunshade Blue
1.2 U-value :	☐	☐	☐	☐	☐	n/a
1.0 U-value * :	☐	☐	☐	☐	☐	☐

Roof Vent Accessories :

- **Brass effect** (Gold) 1m pole : ☐
- **Chrome** 1m pole : ☐
- **Electric Motor** : ☐
- **Rocker Switch** (single) : ☐
- **Rain check** : ☐
- Full **Climate Control** : ☐

Additional Comments :